

Burford Paintable Island Unit Assembly & Application Information




Introduction

This leaflet gives a general overview of the materials and assembly method for constructing the Burford Paintable Island Unit. **Size applications can vary due to specific requirements, however this leaflet shows what can be achieved using the components listed.**

Application Example

The illustration below shows a typical example of what can be achieved, detailing panel sizes and component positioning.

Note: For painting the components for the Burford Island Unit, please refer to the painting leaflet available on Depotlink.

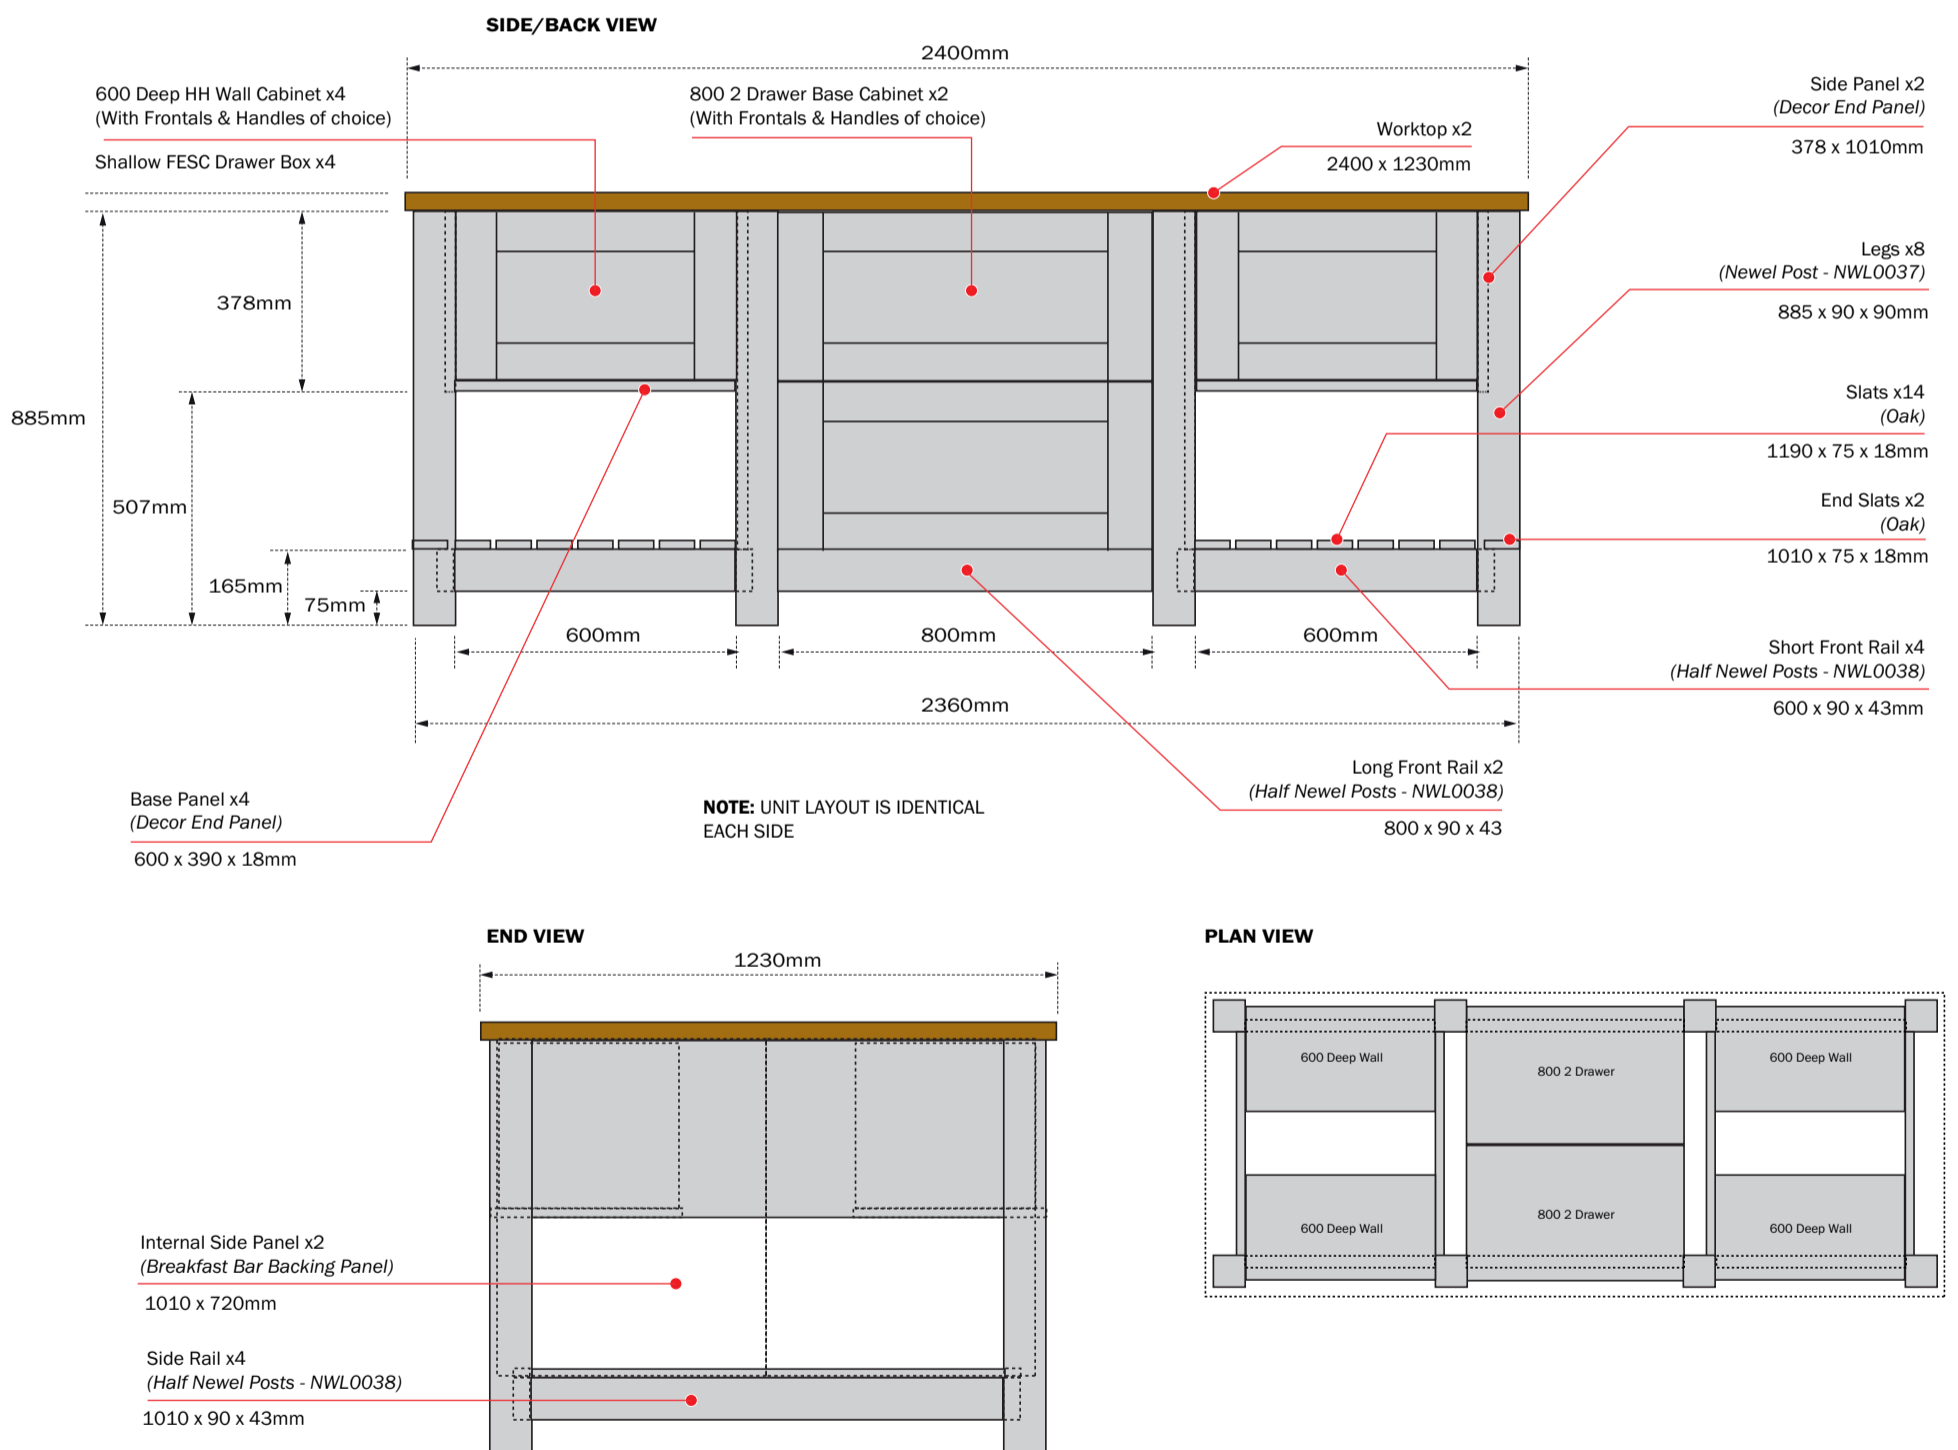


Components Required

600 Half Height Wall Cabinet (inc. frontals) x4
 800 2 Drawer Cabinet (inc. frontals) x2
 Tower Decor End x1
 Deep Wall Decor End x4
 Breakfast Backing Panel x2
 2.4m Worktop x2
 Oak Slats x16
 Oak Square Newel Post (NWL0037) x8
 Oak Square Half Newel Post (NWL0038) x6

Shallow Drawer Box x4 (HYH3255 deep or HYH3250 std)
 Assembly Screws - 30mm & 40mm
 Dowels (8mm) x56
 Glue

Installation Example

Follow the exploded diagram below for component identification and positioning. Fittings use and locations can vary depending on the materials and preference of the fitter.

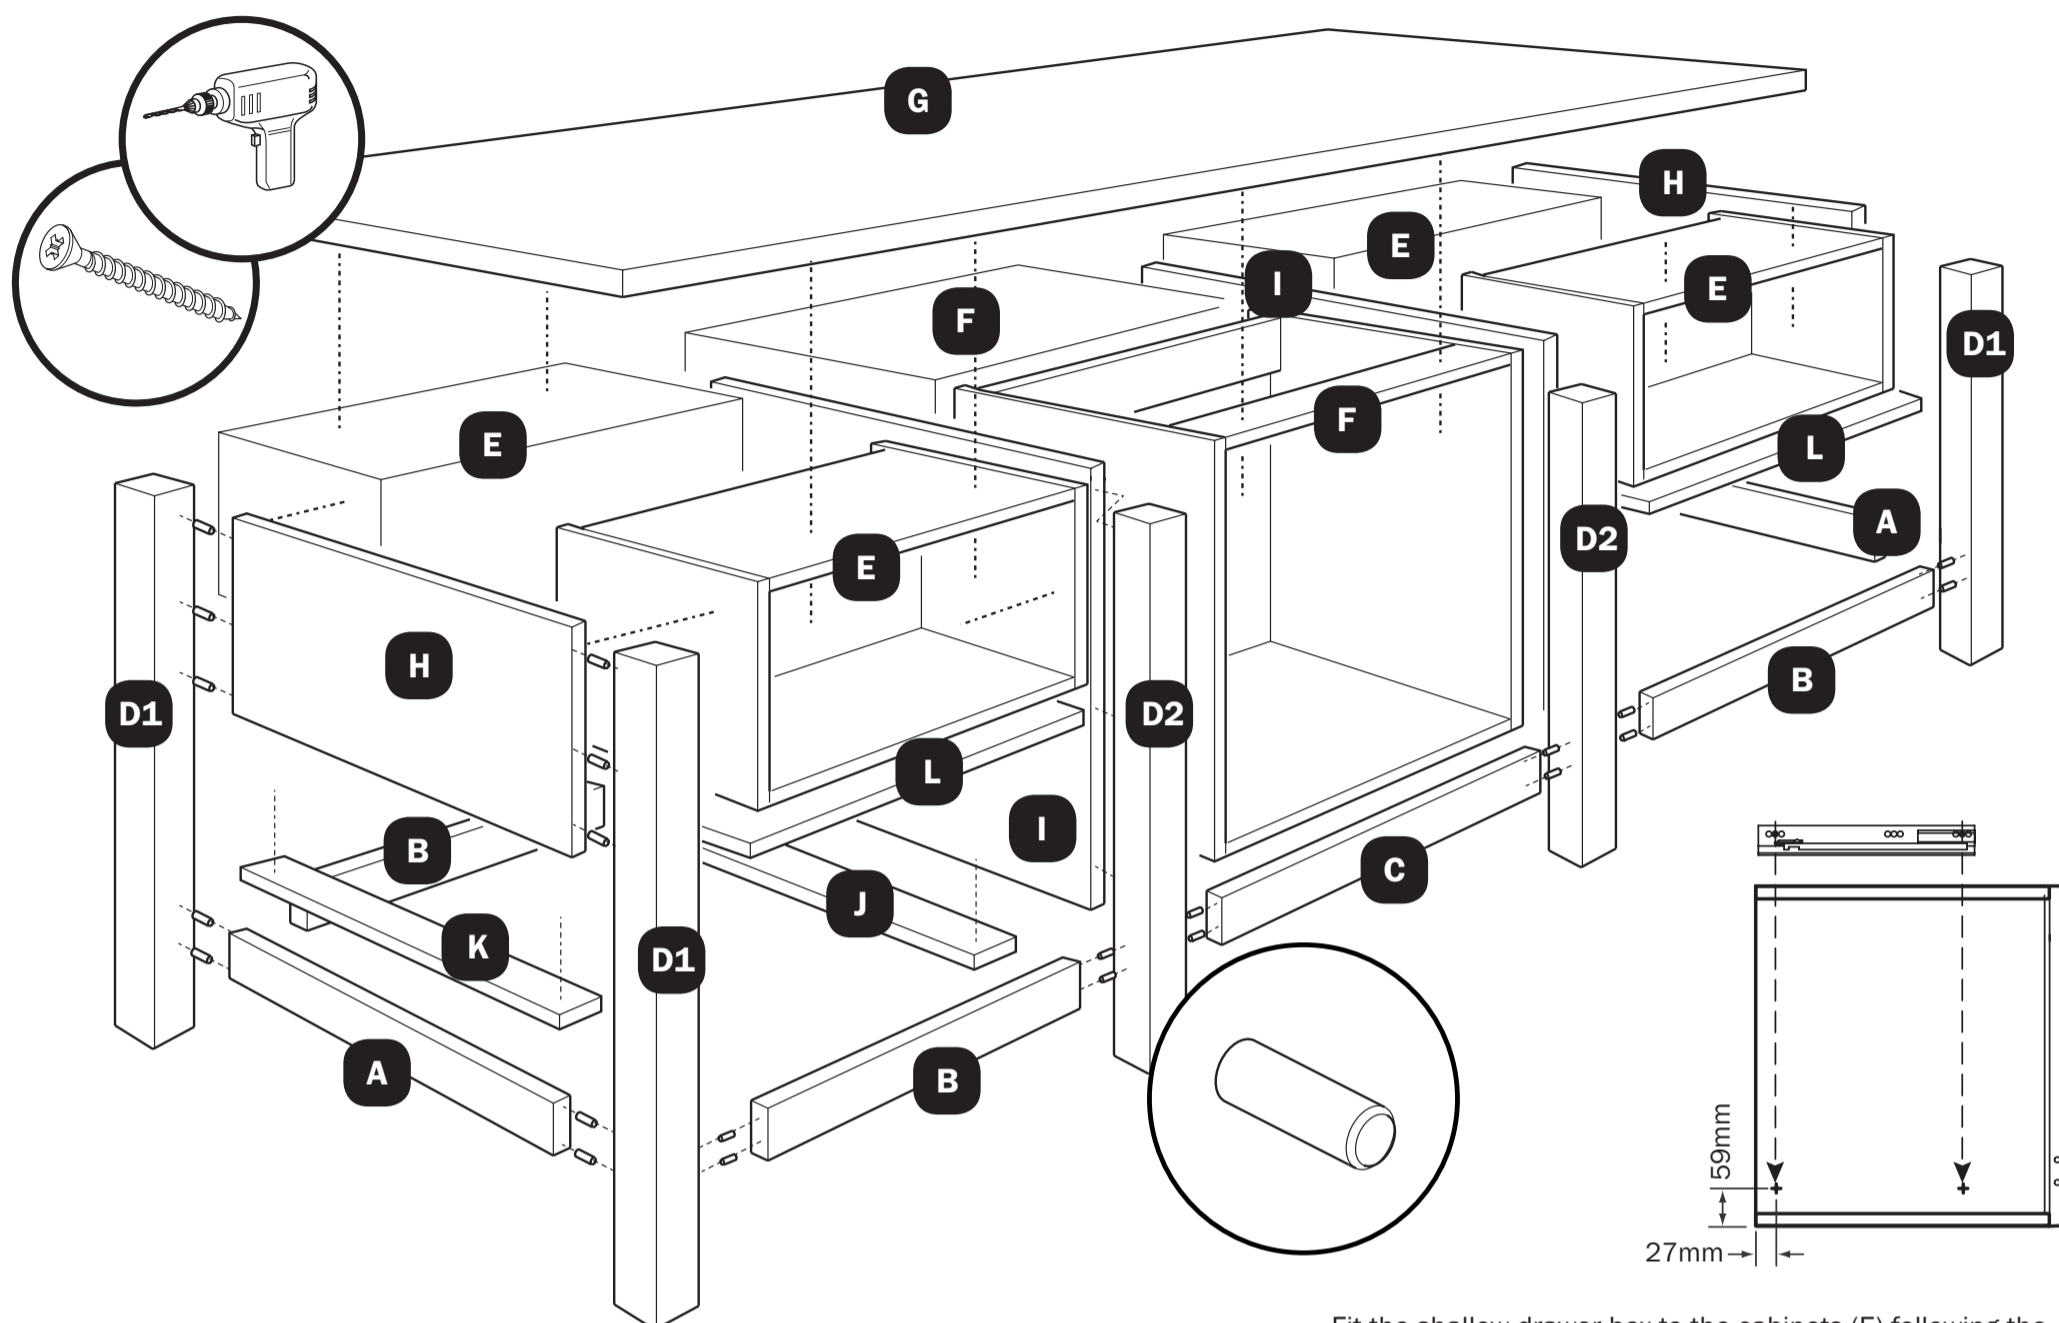

Fit the shallow drawer box to the cabinets (E) following the dimensions. **Note:** Please refer to the kitchen installation manual for drawer adjustment and frontal fixing.

1. Cut the panels to the correct sizes following the application example.

Note: Make sure the panels are measured and checked before cutting.

2. Drill the legs (D1 & D2) and the front and side rails (A, B & C) for dowel locations. **Note:** Check your measurements before drilling.

3. Apply glue to dowel holes in the rails then gently tap dowels into position.

4. Drill dowel locations in the side edges of the end panel (H) and corresponding holes in the top of the legs (D1). Apply glue to dowel holes in the end panel and gently tap dowels into place. We recommend 3 dowel fixings per side.

Note: Once fitted, the rails (A, B & C) should be flush with the inside edges of the legs.

5. Assemble the end leg frames together (A, H & D), aligning dowels with glued dowel holes.

6. Drill dowel locations in the side edges of the internal side panels (I) and corresponding holes in the leg sections (D). Apply glue to dowel holes in panels (I) and gently tap dowels into position. We recommend 3 dowel fixings per side.

7. Fit the internal side panel (I) and legs (D2) together aligning dowels with glued dowel holes.

ASSEMBLE THE END SECTIONS UPSIDEDOWN FOR EASE OF ASSEMBLY

8. Fit the two leg sections (D1 & D2) each side of the HH wall cabinets (E) and front rails (B). Secure the cabinets to the front legs and side panels from the inside using assembly screws to secure.

IMPORTANT: Cabinets should be positioned back from the front edge of the legs by the thickness of the frontal. This will mean the frontals will be flush with the front of the legs once fitted.

Repeat stage 8 for the other side assembly

9. Fit a decor end panel (L) to the underside of the HH cabinets (E). Secure through the decor end and into the underside of the cabinet.

Note: The front of the panel should be flush with the front of the legs

TURN THE END SECTIONS UPRIGHT

10. Join the two end frame assemblies together placing the rails (C) in between the legs (D2). Secure the rails aligning dowels with glued dowel holes.

11. Fit the two central cabinets to the assembly, securing them to the legs (D2). Cabinet legs should be fitted to the back leg positions of the cabinet for stability. Adjust the legs to the correct height so cabinet is level.

IMPORTANT: Cabinets should be positioned back from the front edge of the legs by the thickness of the frontal. This will mean the frontals will be flush with the front of the legs once fitted.

Secure the cabinets together at the back using metal plates for extra stability.

12. Join two worktops (G) together using the worktop fixing bolts. Follow the kitchen installation manual for information on joining worktops.

13. Fit the top (G) to the assembly placing centrally (20mm overhang all around). Secure the top up through the cabinets (E) and (F) using assembly screws. Note: If using granite tops, silicone fix to the tops of the cabinets.

14. Fit the slats (J & K) to each side of the unit. Secure the slats to the rails (A & B) using screws to secure. Drill the slat positions before securing with the screws.

15. Fit the drawer boxes and frontals to the 2 drawer base cabinets.

16. Fit the runners to the HH wall cabinets in the positions shown then secure the frontals.

For handle fixing and runner adjustment, refer to the kitchen installation manual.